

Filter Data Sheet


High Purity – General Grade PES

Hydrophilic Polyethersulfone (PES) Membrane for Liquid Filtration Applications

General Grade PES Cartridges are designed for general purpose use wherever a cost effective membrane filter is required. Manufactured to hold the maximum amount of filter media that can be completely and effectively utilized in a cartridge. General Grade Cartridges are manufactured from an inherently hydrophilic PES membrane. The cartridge offers excellent flow characteristics, extended service life, and broad chemical compatibility.



Flow Rate

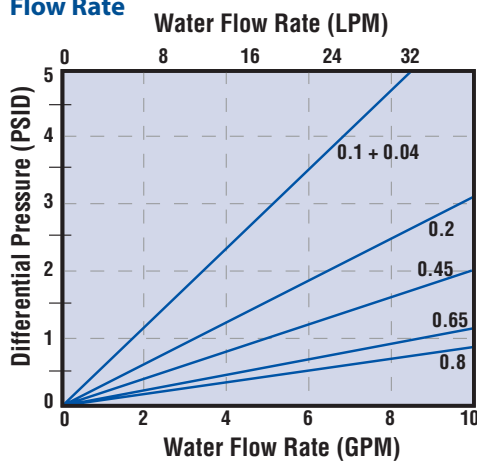

Typical Applications

Deionized Water Systems
General-Use Water Filtration
Liquid Clarification
Recirculating Fluids
Chemical Filtration

Construction Materials

MembranePolyethersulfone (PES)
Support MediaPolypropylene
End CapsPolypropylene
Center CorePolypropylene
Outer Support CagePolypropylene
O-Rings/Gaskets....Buna, Viton, EPDM, Silicone, Teflon® Encapsulated Viton

Sanitization/Sterilization

Filtered Hot Water80°C for 30 Minutes
Steam Sterilization.....121°C for 30 min, multiple cycles

Chemicals: Cartridges are chemically compatible with most chemicals and sanitizing agents

Note: Stainless insert option needed for all cartridges being hot water sanitized or steam sterilized.

Dimensions

Length:
10 to 40 inches (25.4 to 101.6 cm) nominal
Outside Diameter:
2.75 inches (7.0 cm) nominal

Maximum Recommended Operating Conditions

Maximum Temperature176°F (80°C)

Maximum Differential Pressures

Forward50 psi (3.4 bar) at 20°C
Reverse40 psi (2.7 bar) at 20°C

FDA Listed Materials

Manufactured from materials which are listed for food contact applications in title 21 of the U.S. Code of Federal Regulations.

Toxicity

All polypropylene components meet the specifications for biological safety per USP Class VI - 121°C for plastics.

Ordering Information

GGPES	Pore Size	A	Length	C	End Cap Code	O-Rings/Gaskets	Adders
	0.04		10 (25.4 cm)		2 = DOE - Flat Gasket	B = Buna	I = Stainless Steel Insert
	0.1		20 (50.8 cm)		3 = 222 w/ Fin	E = EPDM	
	0.2		30 (76.2 cm)		4 = 222 w/ Flat Cap	S = Silicone	
	0.45		40 (101.6 cm)		6 = 226 w/ Flat Cap	V = Viton	
	0.65				7 = 226 w/ Fin	T = Teflon Encapsulated Viton	
	0.8				16 = 213 Internal O-Ring		